



# DURASCAN® D745

## Medical Grade Barcode Scanner for Healthcare

The D745 is a Universal Bluetooth barcode scanner specifically designed for healthcare environments and reads all 2D/1D barcodes on paper or screen. Built with [medical grade plastic](#) to withstand daily cleaning and harsh disinfectant solutions to help maintain cleanliness. Its environmental seal is IP54 rated to protect the unit from dust, water, alcohol and other liquids. Its durable design was built to be dropped hundreds of times. The scan button was tested to handle over five million presses in environments needing frequent scanning.

The D745 is small and light enough to always be carried, and it is ergonomically designed to fit perfectly in your hand. It can slip in your pocket or be worn with a wrist strap or holster. The Bluetooth wireless technology allows freedom of movement all workday, and the field-replaceable battery lasts an entire 12-hour shift.

From patient admissions, to bedside point of care, to the pharmacy, the D745 is an ideal solution for applications such as drug identification, medication management, specimen collection, Blood Infusion Safety, and patient identification.

It is Apple Certified and can be fully integrated and controlled by your iOS or Android application.



Patient ID



Pharmacy Inventory



Patient Tracking



## Features

- **Medical Grade Housing** – IP54 sealing and designed to resist the harmful effects of harsh cleaning agents. Allows safe wipe-down with a wide variety of harsh chemicals to help prevent the spread of germs.
- **Scanning** – Fast 2D and 1D omni-directional barcode scanning with highly visible and safe LED aimer. Scans on paper or screen.
- **Certified by Apple® for iOS devices** – Guaranteed Compatibility.
- **Native App Support** – Socket Mobile's Capture SDK enables easy native app integration in your applications to improve business productivity.
- **Exceptional Ergonomics** – Small, light and fits perfectly in the hand for comfortable use over extended periods of time.
- **User Feedback** - Audible tones and hand pulsation. Set the scanner hand pulsation only when you do not want to disturb others with scanning sounds.
- **User Indicators** – Intuitive LEDs, Bluetooth connection, battery level and scanning status.
- **Long-Lasting, Replaceable, Rechargeable Battery** - Designed to last over an entire busy 12-hour shift, with an LED indicator that alerts the user when a battery charge is needed.
- **Rugged Design** - withstands 2,500 drops to Linoleum from 5' and 5,000,000 scan presses.
- **Bluetooth Wireless Technology** - Dependable Bluetooth connection to iOS, Android and Windows 10 devices. Auto-reconnection maintains connection even in different environments.
- **Wearable** - Wrist strap included. Optional: Holster and Durable Retractable Clip available.
- **Designed and Made in the USA.**
- **Barcode scanner 1 year warranty, Battery, Cables, and Wrist Strap 90 days warranty.**
- **Extended Warranty** - Our optional flexible service plans keeps your scanner up and running in like-new condition with coverage for accidental damage and everyday wear-and-tear.


# PHYSICAL CHARACTERISTICS

1.5 in. (37.1 mm)

1.6 in. (40.1 mm)

Weight/Mass  
3.8 oz. (109g)

5.2 in.  
132.2 mm

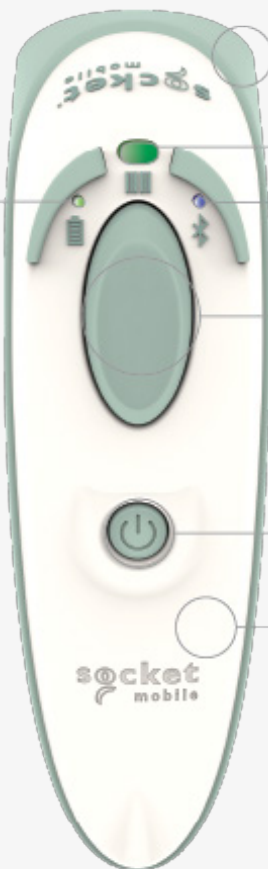

Medical-Grade Rubber

Scan LED (Green/Red)

Bluetooth LED (Blue)

Scan Button (Green/Red)

Power Button  
(enabled on-screen key-  
board) in Basic Mode

Medical-Grade Plastic

Power Connector

Pins for Charging  
Cradle/Dock/Stand



Cradle/Stand Attachment


Removable Battery Door

Cradle/Dock/  
Stand Attachment

Lanyard/Wrist  
Strap Eyelet

# SINGLE PACKAGE INCLUDES

- (1) DuraScan D745, 2D/1D Barcode Imager
- (1) Charging Cable
- (1) Wrist Strap
- (1) Get Started Insert



Socket Mobile Companion  
Download for Free!

The D745 is available in 2 packages:

Scanner (SKU# CX3861-2892)  
Scanner w/ Charging Cradle (SKU# CX3859-2890)

# OPTIONAL ACCESSORIES

Charging Stand



Great for using AutoScan Mode

Medical Grade Charging Cradle



Perfect for wall mounting

Charging Dock



Ideal as a desktop charger

Durable Retractable Clip



Provides quick access to scanner

Holster



Safe and accessible placement

Wrist Strap or Lanyard



Default Barcode Symbologies:

**1D Symbologies:** Codabar, Code 39, Code 93, Code 128, EAN-13/JAN 13, EAN-8/JAN 8, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, ISBT 128, UPC-A, UPC-E, UPC-E1

**2D Symbologies:** Aztec, Data Matrix, Maxicode, Micro QR Code, Micro PDF417, PDF417, QR Code

**Postal Codes:** USPS 4CB/One Code/Intelligent Mail

Supported Barcode Symbologies:

**1D Symbologies:** Bookland EAN, Chinese 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, Composite CC-A/B, Composite CC-C, Composite TLC-39, Discrete 2 of 5, EAN-13/JAN 13, EAN-8/JAN 8, GS1 Databar, GS1 Databar Expanded, GS1 Databar Limited, GS1-128, Interleaved 2 of 5, Inverse 1D, ISBT 128, ISSN EAN, Matrix 2 of 5, MSI, UPC-A, UPC E/E-1

**2D Symbologies:** Aztec, Data Matrix, Han Xin, Maxicode, Micro PDF417, MicroQR, PDF417, QR Code

**Postal Codes:** Australia Post, Japan Postal, Netherlands KIX Code, UK Postal, UPU FICS Postal, US Planet, US Postnet, USPS 4CB/One Code/Intelligent Mail

Scan Angle:

48° (Horizontal) - 30° (Vertical)


Sensor Resolution:

1280 horizontal x 800 vertical pixels

Print Contrast:

Down to 25%-20%

Reading Distance:

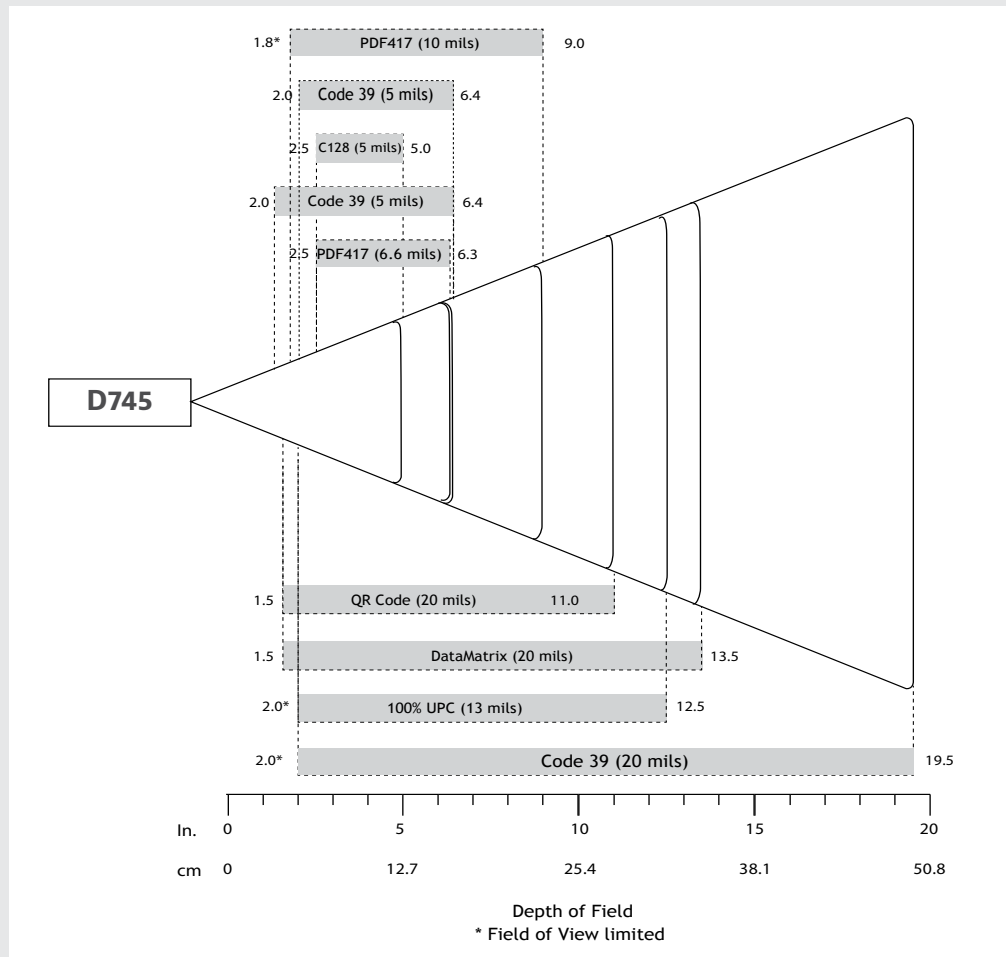

4.5 to 49.5 cm (1.5 to 19.5 in.) Depends on barcode size, symbology, label media

Decode Ranges:

	Near	Far
5 mil Code 39	2.0 in/5.1 cm	6.4 in/16.2 cm
5 mil Code 128	2.5 in/6.3 cm	5.0 in/12.7 cm
6.6 mil PDF417	2.5 in/6.3 cm	6.3 in/16.0 cm
10 mil PDF417	1.8 in/4.5 cm*	9.0 in/22.8 cm
13 mil 100% UPC	2.0 in/5.1 cm*	12.5 in/31.7 cm
20 mil Code 39	2.0 in/5.1 cm*	19.5 in/49.5 cm
20 mil Data Matrix	1.5 in/3.8 cm	13.5 in/34.3 cm
20 mil QR Code	1.5 in/3.8 cm	11.0 in/27.9 cm

Battery Type:	Replaceable 1400 mAh Lithium - Ion Battery
Charge Time:	6 Hours
Battery Life - Per Full Charge:	Battery Friendly with standby time: over 20 hours Active Scan Time: 85,000 scans within 9 hours (based on 2 scans every 1 second) 17,000 scans within 19 hours (based on 1 scan every 4 seconds)
Note:	Battery life varies depending on ambient temperature, ambient light and age of battery. <i>For more battery information <a href="#">click here</a>.</i>
Number of Batteries Used:	1
Weight of Battery:	35g
Percentage Lithium:	26.5%
Battery mAh:	1400 mAh
Number of Cells Per Battery:	1
Watt Hours Per Battery:	5.55
Type of Cell (ex. AA):	Proprietary
Chemical Composition (ex. Alkaline):	Lithium-polymer
Lithium Content:	9.32g
Battery Voltage:	3.7v
Hazmat UN Number:	UN3481, P.I. 967
ROHS Compliance Indicator:	Yes, included with scanner
Battery Country of Origin:	China
Commodity Code:	8507.60.0000

## BLUETOOTH (WIRELESS CONNECTION)

Bluetooth Radio:	Class 2 Bluetooth, version 2.1 + EDR (Enhanced Data Rates) with 56-bit data encryption
Bluetooth Range:	Up to 10 meters (33 ft.) depending on environment, range limit is usually due to the Host Device (phone, tablet or notebook)
Bluetooth Profiles:	Basic Mode - Human Interface Device (HID)*, Application Mode - Serial Port Profile (SPP) and Application Mode - MFi-SPP. Some Operating Systems or smartphone/tablet models may support only one profile. <i>*By default, the scanner is set to Basic Mode (HID).</i>

## SCANNER TYPE

Technology:	2D/1D Barcode Imager
Light Source:	Hyper Red 660 nm (nanometer) LED
Aimer:	610 nm red LED

## USER ENVIRONMENT

Ambient Light:	From 0 to 100 000 lux, From pitch black to direct sun light
Operating Temperature:	0° to 45° C (32° to 113° F)
Storage Temperature:	-5° to 70° C (-22° to 158° F)
Relative Humidity:	95% at 60° C (140° F) (non-condensing)
Sealing:	IP54 (Ingress Protection rating for dust and water) EN60529
Drop Specifications:	6 drops to concrete - 1 on each side at 6.6 ft. (2 m)
Tumble Specifications:	2,500 cycles at 3.3 ft. (1 m) to metal plate, IEC6008-2-31, IEC60068-2-32 3)

# OPERATING SYSTEM COMPATIBILITY

Android OS - Basic Mode (HID)\* & Application Mode (SPP)

Mac OS and Linux - Basic Mode (HID)\* only

Apple iOS - Basic Mode (HID)\* & Application Mode (MFi-SPP)

Windows OS - 10, 8, and 7 - Basic Mode (HID)\* & Application Mode (SPP)

Compatible with devices supporting Basic Mode (HID)\* protocol. Supported keyboard languages - ANSI, English UK, English, French, German, Italian, Japanese, Polish, Spanish and Swedish

*\*By default, the factory settings of the Socket Mobile Scanners are set to Basic Mode (keyboard emulation: HID). In order to use the scanner with an application using Capture SDK, the scanner must be configured in Application Mode (Bluetooth Serial Port Profile: SPP)*

Certified by Apple® for iOS devices (iPad®, iPhone®, iPod Touch®) and compatible with Android and Windows®.

iOS



OS X



## CERTIFICATION & REGULATORY

Bluetooth SIG: Declaration ID: D030473 QD ID: 82009

Electrical Safety: Certified to IEC 60950-1, UL 60950-1, CAN/CSA C22.2

Environmental: Environmental: RoHS EN 50581

EMI / RFI: FCC Part 15 Class C, RSS 210, iCES 003, C-Tick, CISPR 22, CE EN55022, EN55024, TELEC  
 FCC ID: T9J-RN41-3  
 IC ID: 6514A-RN413  
 Telec ID: 201-135280

LED Safety: IEC 62471, EN 62471 (EXEMPT GROUP)



## WARRANTY

Scanner: Standard one year limited warranty

Accessories: 90 days (batteries, charging cable, wrist strap)

Extended Warranty: [www.socketmobile.com/socketcare](http://www.socketmobile.com/socketcare)  
 (sold separately)



## COMMON USES

Admitting / Discharge

Specimen Collection / Tracking

Patient ID Wristbands

Medication Administration

Pharmacy Inventory

Document Tracking

Retail/Point of Sale

Warehouse management

Transportation

Office use

Shipping & Receiving

Mobile Tracking

Healthcare

Field Sales/Service

Inventory

[socketmobile.com](http://socketmobile.com)

[sales@socketmobile.com](mailto:sales@socketmobile.com)

[sales-japan@socketmobile.com](mailto:sales-japan@socketmobile.com)

Worldwide: +1 510 933 3000

Asia Pacific: +1 510 933 3122

Japan: +8190 9808 0518

North America: +1 800 552 3300

Germany: +41 62 834 07 80

Japan Toll-Free: +81 (800) 9190303

EMEA & Russia: +41 62 834 07 80

Switzerland: +41 62 834 07 80

Latin America: +1-510-933-3153

France: +33 970 462 241

Switzerland Toll-Free: +41 (800) 898003

UK/Ireland/South Africa: +44 (800) 0487363

© 2020 Socket Mobile, Inc. All rights reserved. Socket®, the Socket Mobile logo, DuraScan®, DuraScan™, Battery Friendly® are registered trademarks or trademarks of Socket Mobile, Inc. Microsoft® is a registered trademark of Microsoft Corporation in the United States and other countries. Apple®, iPad®, iPad Mini®, iPhone®, iPod Touch®, and Mac iOS® are registered trademarks of Apple, Inc., registered in the U.S. and other countries. The Bluetooth® Technology word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Socket Mobile, Inc. is under license. Other trademarks and trade names are those of their respective owners.